
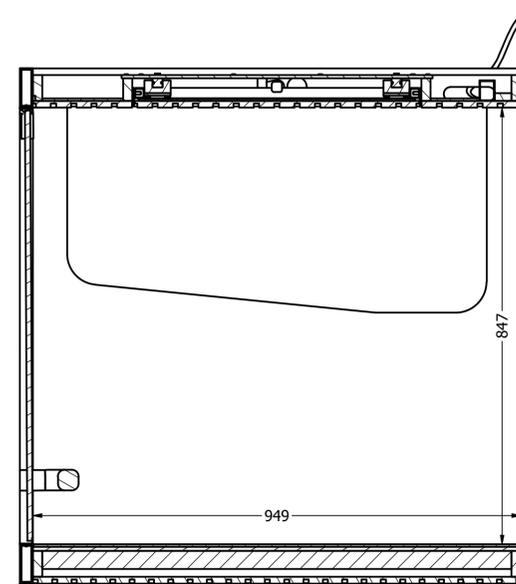
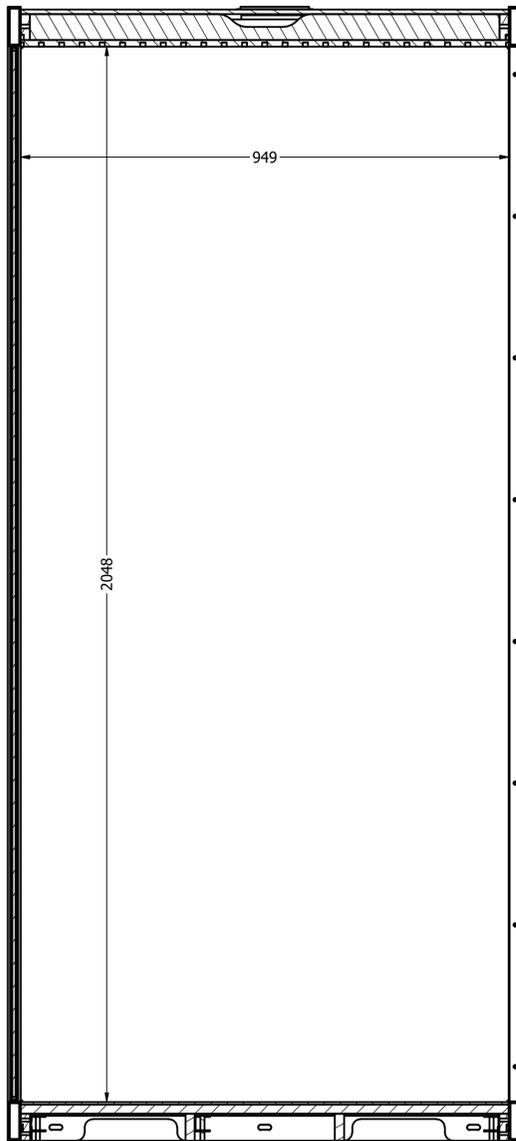


8 7 6 5 4 3 2 1

EXTERNAL

INTERNAL

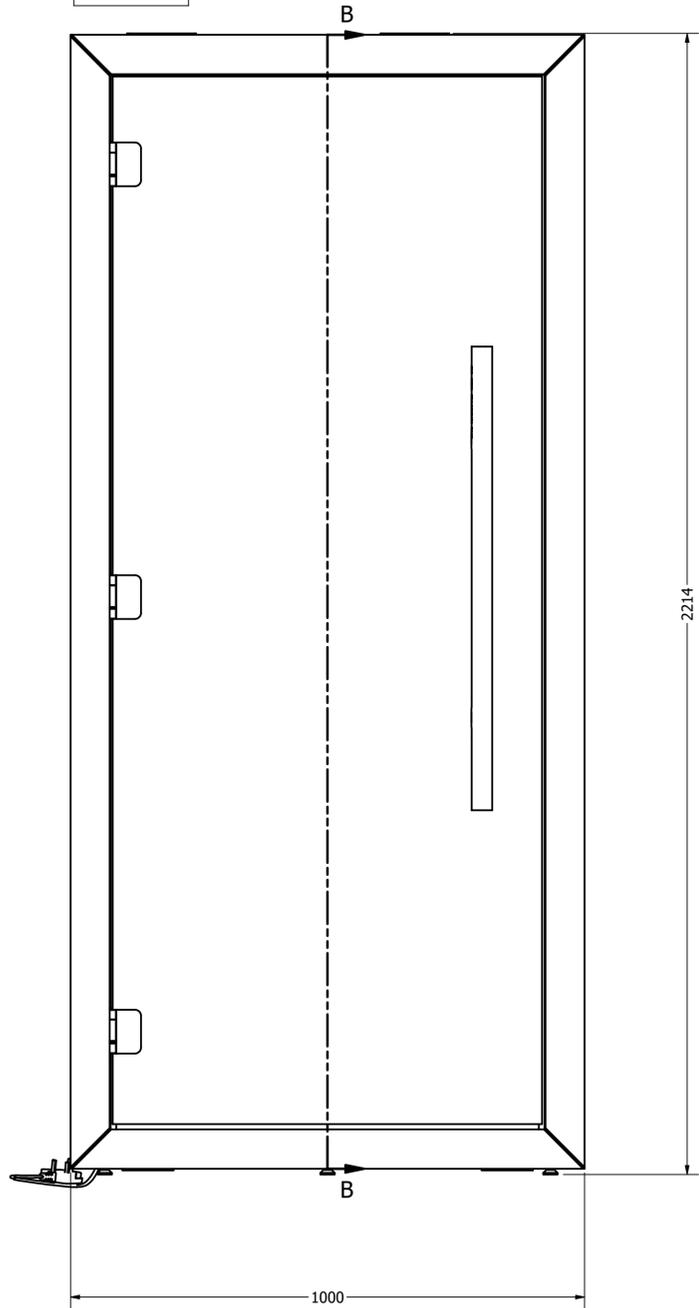

SECTION B-B
SCALE 1 / 7

SECTION A-A
SCALE 1 / 7

DRAWN	TOM DUNFORD	04/07/2025	THE MEETING POD COMPANY	
CHECKED			TITLE	
QA			PHONE BOOTH TECHNICAL SPECIFICATION	
MFG			SIZE	DWG NO
APPROVED			D	PB TS 04-07
			SCALE	1 / 7
				REV
				SHEET 1 OF 6

8 7 6 5 4 3 2 1

8 7 6 5 4 3 2 1




D

C

B





A

GLAZING

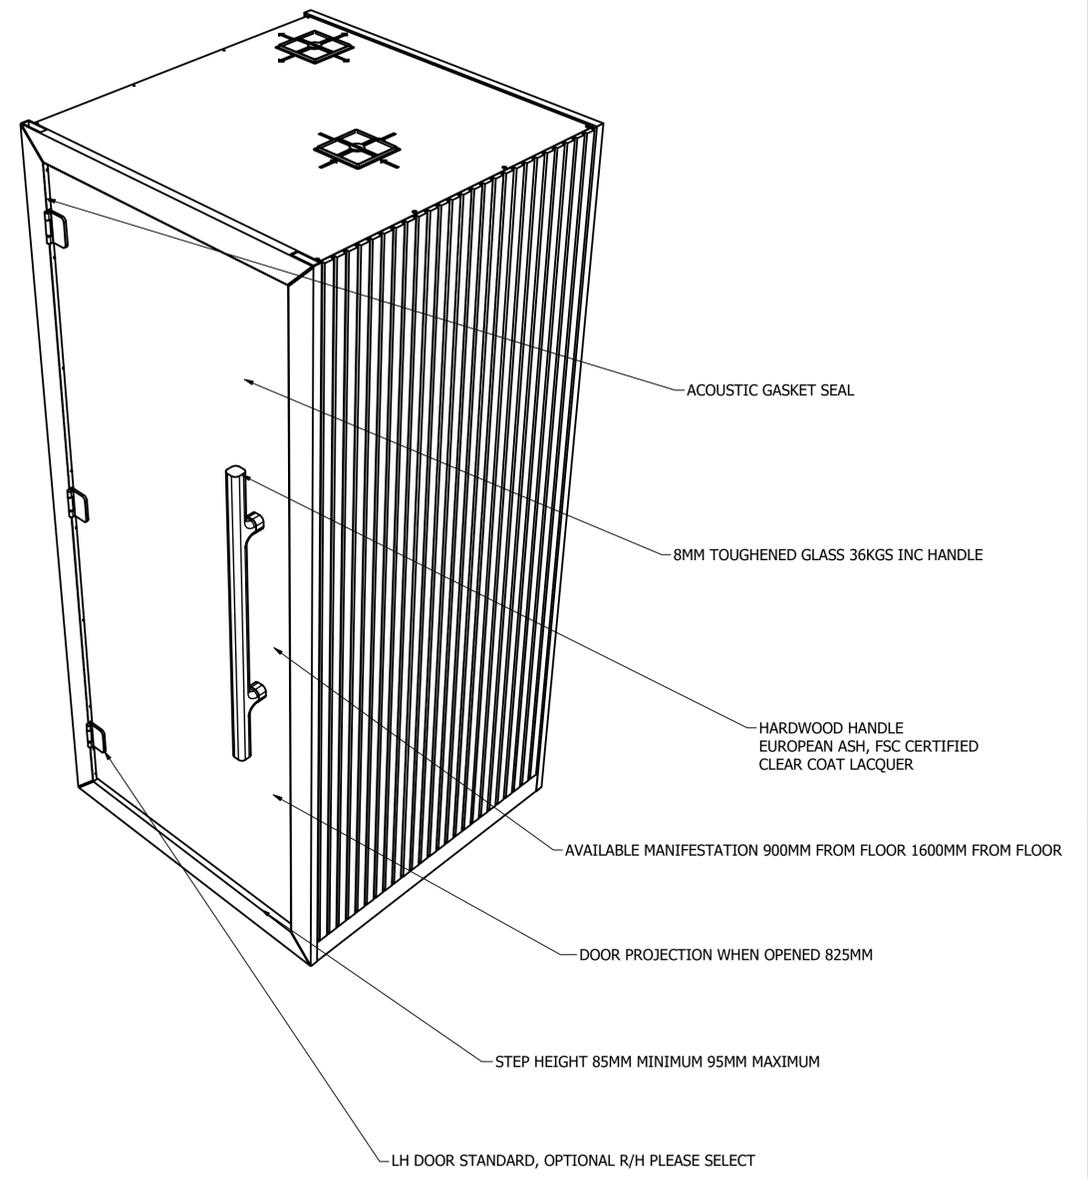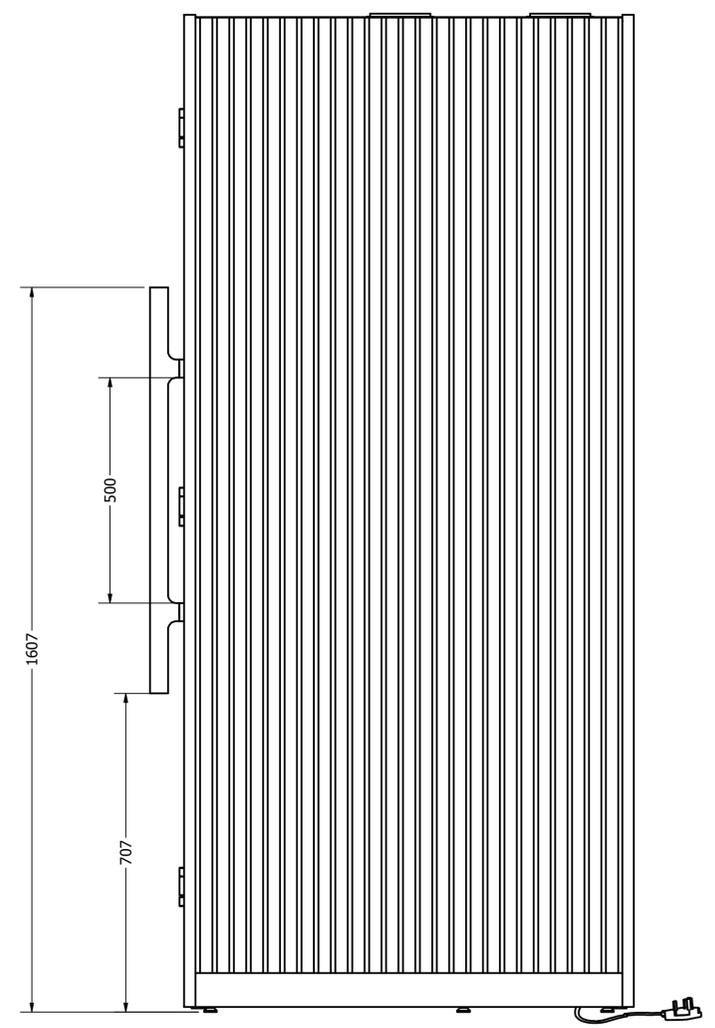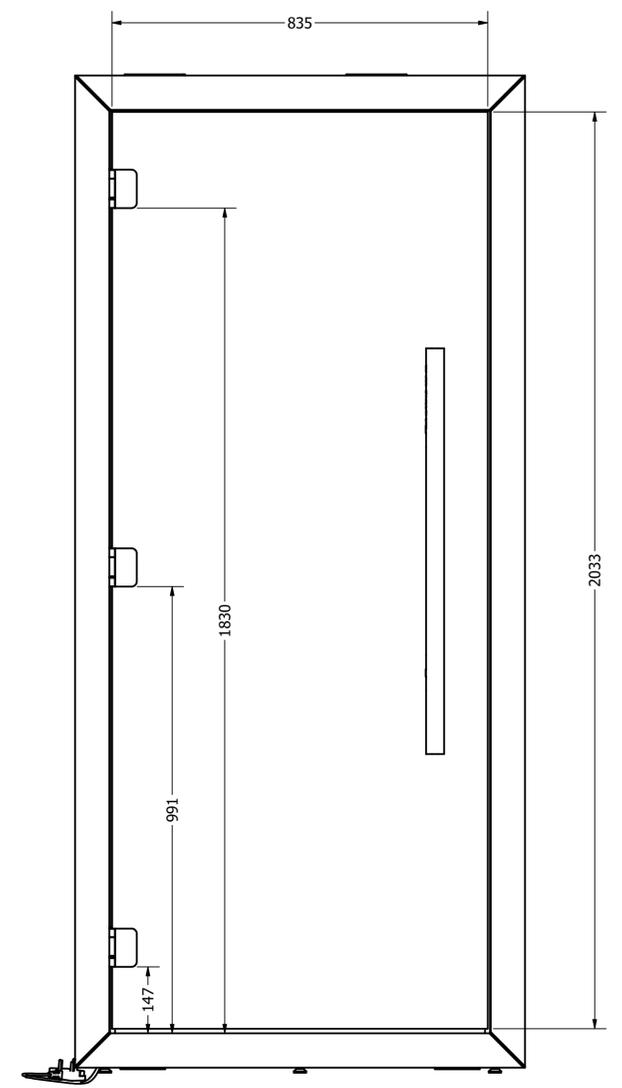


DRAWN TOM DUNFORD	04/07/2025	THE MEETING POD COMPANY	
CHECKED		TITLE	
QA		PHONE BOOTH TECHNICAL SPECIFICATION	
MFG		SIZE	DWG NO
APPROVED		D	PB TS 04-07
		SCALE	1 / 8
			SHEET 2 OF 6

8 7 6 5 4 3 2 1

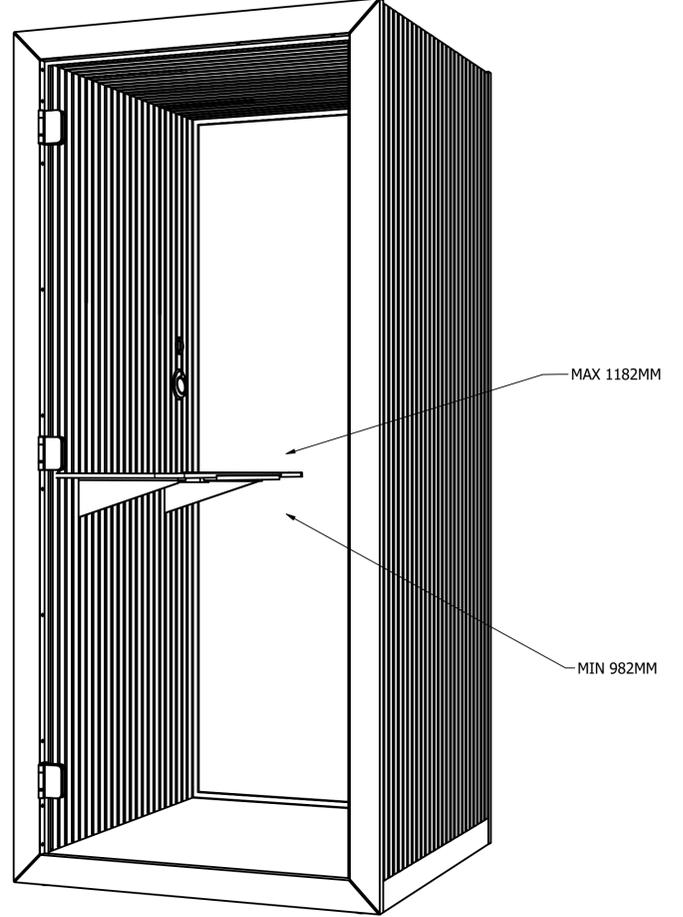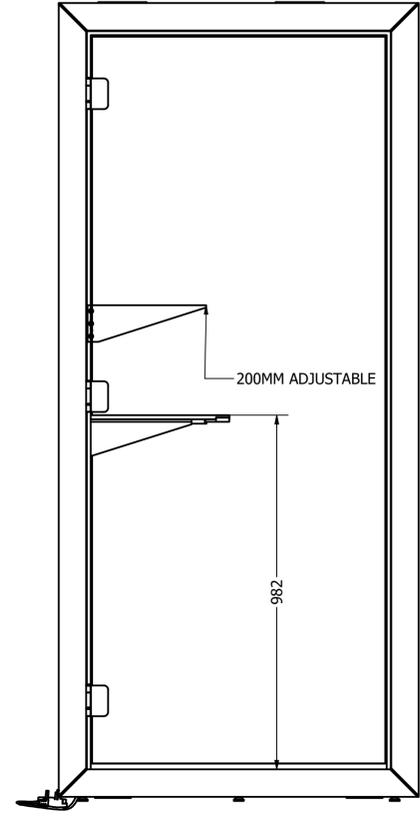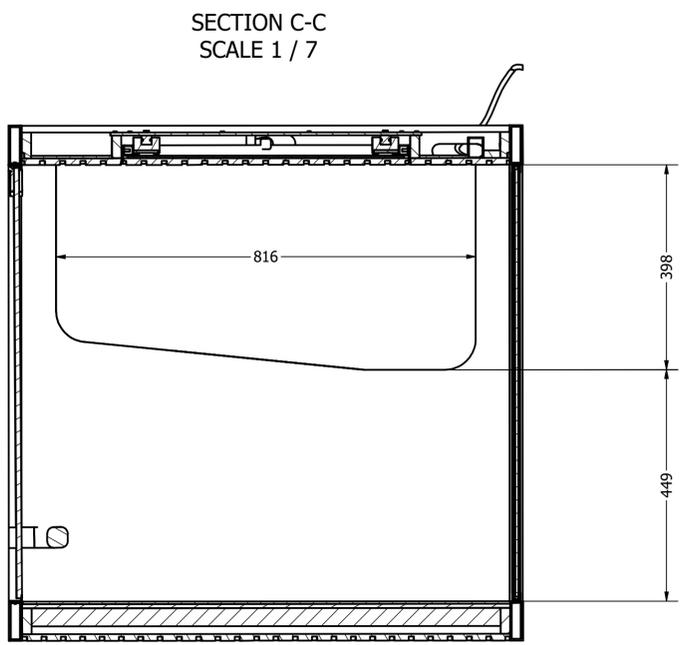
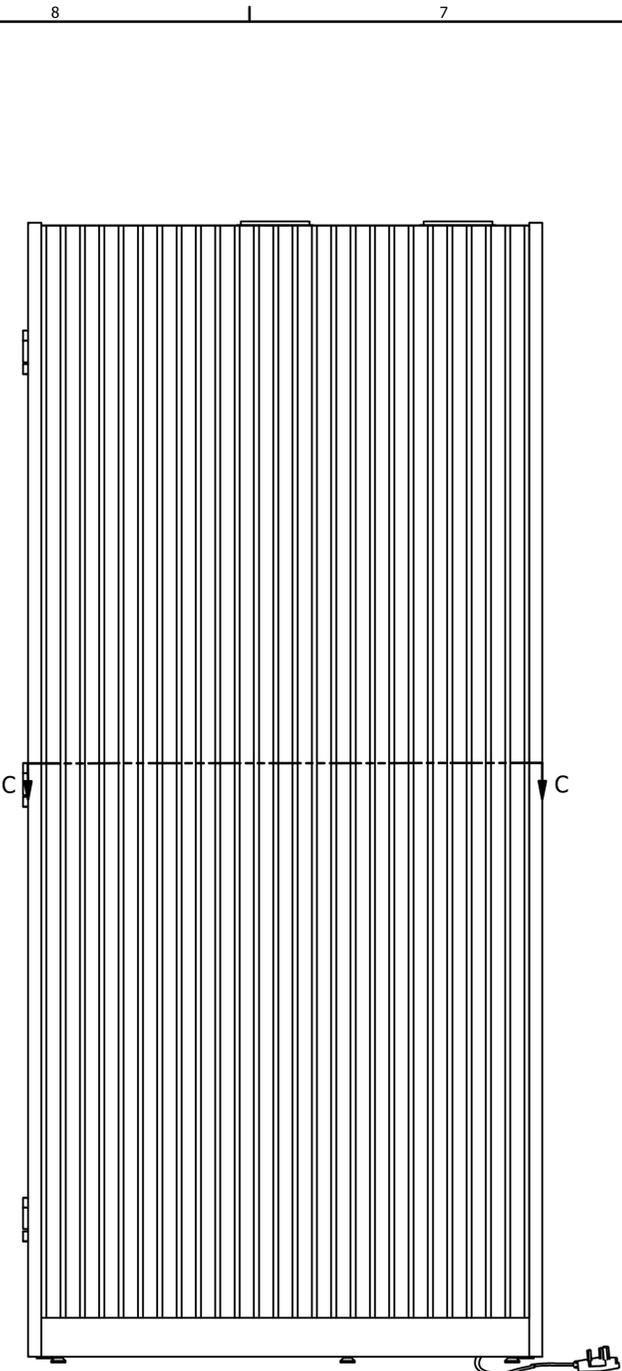


DRAWN TOM DUNFORD	04/07/2025	THE MEETING POD COMPANY		
CHECKED		TITLE		
QA		PHONE BOOTH TECHNICAL SPECIFICATION		
MFG				
APPROVED		SIZE D	DWG NO PB TS 04-07	REV
		SCALE 1 / 7		SHEET 3 OF 6


8 7 6 5 4 3 2 1



- 24V LED LIGHTING
- CEILING TRACK LENGTH 300MM
- WALL TRACK LENGTH 600MM
- TRACK WIDTH 11MM
- DIFFUSER OPAL
- DIMMABLE ON LANTE TOUCHSCREEN
- COLOUR TEMPERATURE 6500K
- 5W PER METRE

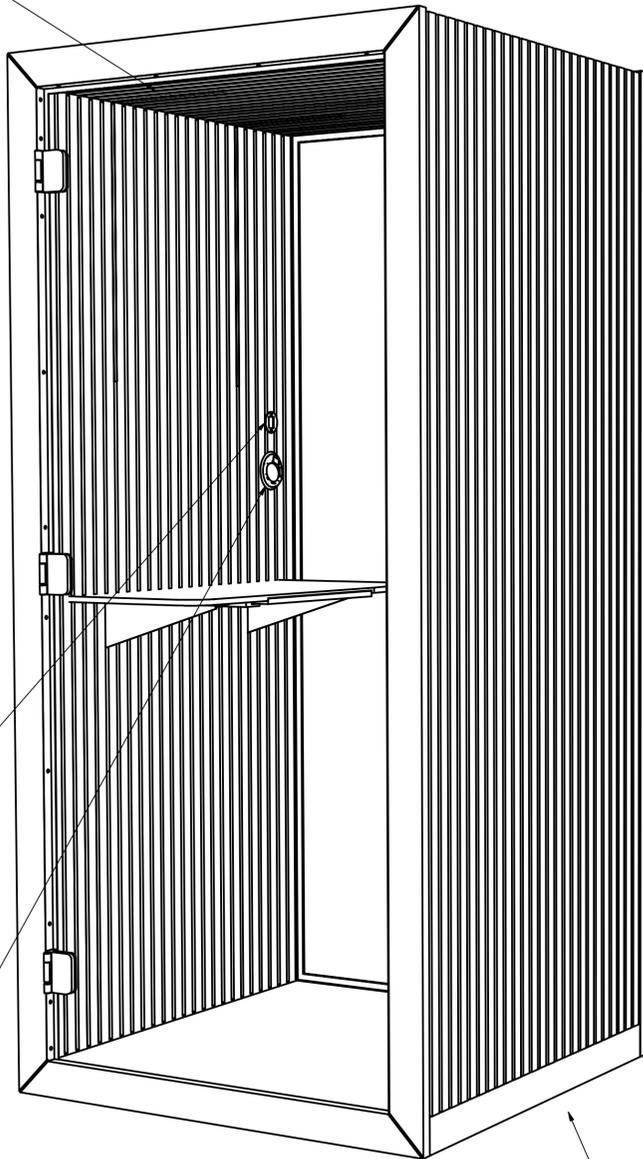



- 12V ADJUSTABLE TABLE
- LINEAR ACTUATOR 8"
 - 750N
 - 2.8 AMP
- 10MM/ SECOND 8MM/ SECOND LOADED




PIXEL SOCKET BLACK FACE , SILVER BEZEL
3.15A/5A
USB A/ USB C TYPE
DATA/HDMI OPTIONS AVAILABLE

CONSUMPTION
IDLE 0.5WATT
PIR OCCUPATION 50.5 WATT
MAXIMUM USAGE 1,234 WATT

EXHAUST INTAKE

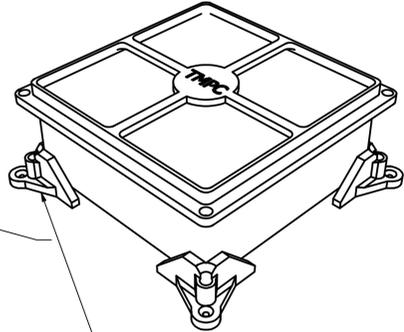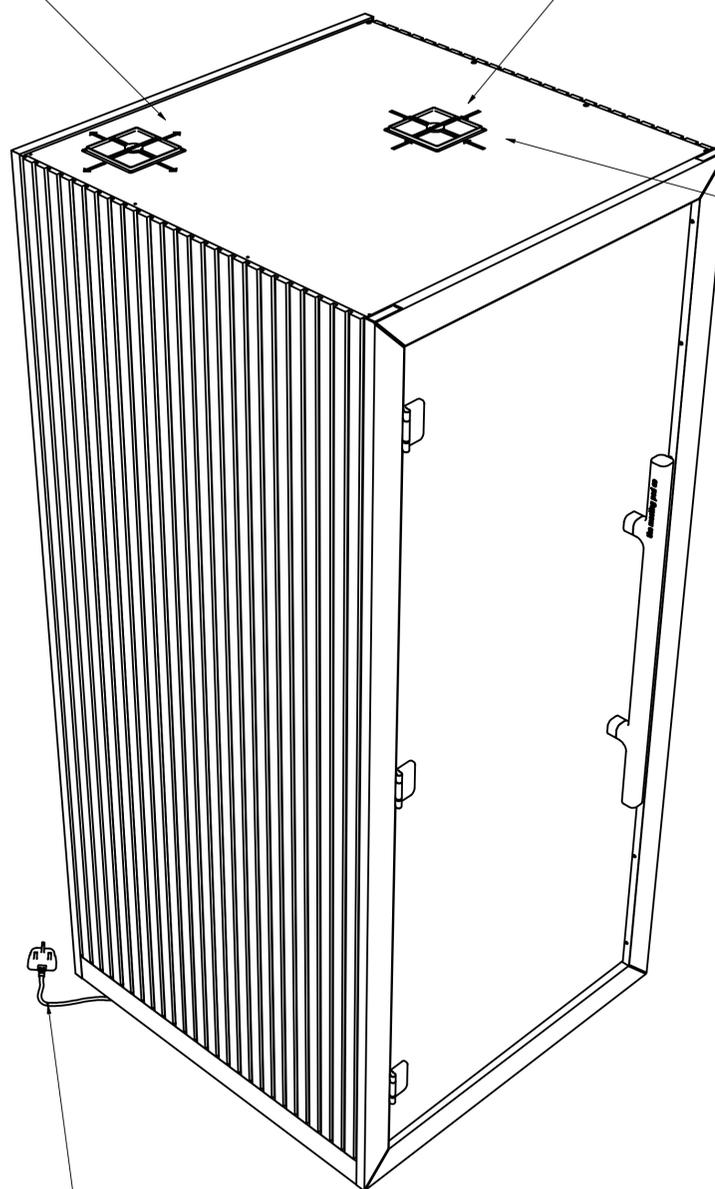


- 12V DC FAN
- 120MM DIAMETER DUAL BEARING
- 26 DB
- 200 CFM
- 184 CHANGES PER HOUR
- HEPA FILTER
- INTAKE POSITION TO TAKE COOL AIR OVER THE WORKING POSITION

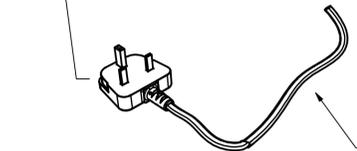

- CONNECTION, UK PLUG SOCKET TYPE
- FUSED 13AMP
- POWER EXIT BACK LEFT
- POWER REACH 1.5METRES FROM CORNER

DRAWN TOM DUNFORD	04/07/2025	THE MEETING POD COMPANY	
CHECKED		TITLE	
QA		PHONE BOOTH TECHNICAL SPECIFICATION	
MFG		SIZE	DWG NO
APPROVED		D	PB TS 04-07
		SCALE	1 / 8
			SHEET 4 OF 6

8 7 6 5 4 3 2 1



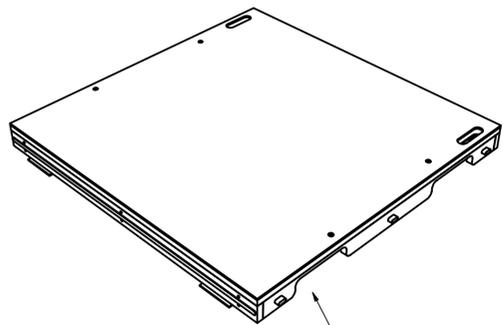


MANEUVERABILITY

TIPS FOR MOVING

- REMOVE GLASS DOOR TO REDUCE WEIGHT BY 38KG'S WHEN WHEELING
- ADJUST FEET CLOCKWISE TO RAISE POD FLOOR UP
- POD ADJUSTMENT 50MM FROM CURRENT STANDING POSITION
- REMOVE LEFT AND RIGHT BLACK FLOOR CAPS
- SLIDE PALLET TRUCK INTO POSITION
- MOVE POD WITH PALLET TRUCK, ONE PERSON OPERATING, 2 PEOPLE HOLDING PRODUCT STABLE DURING TRANSFER


Total weight 221kgs

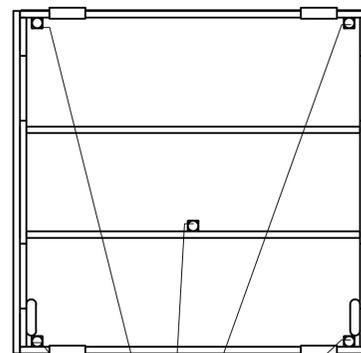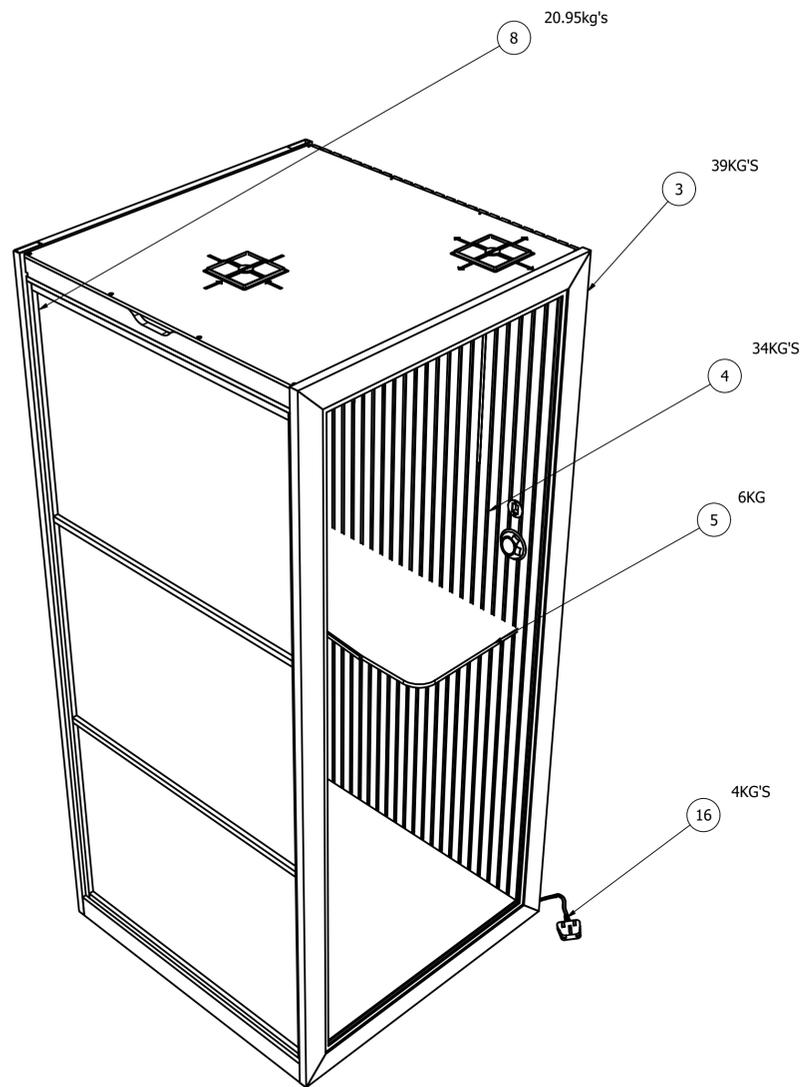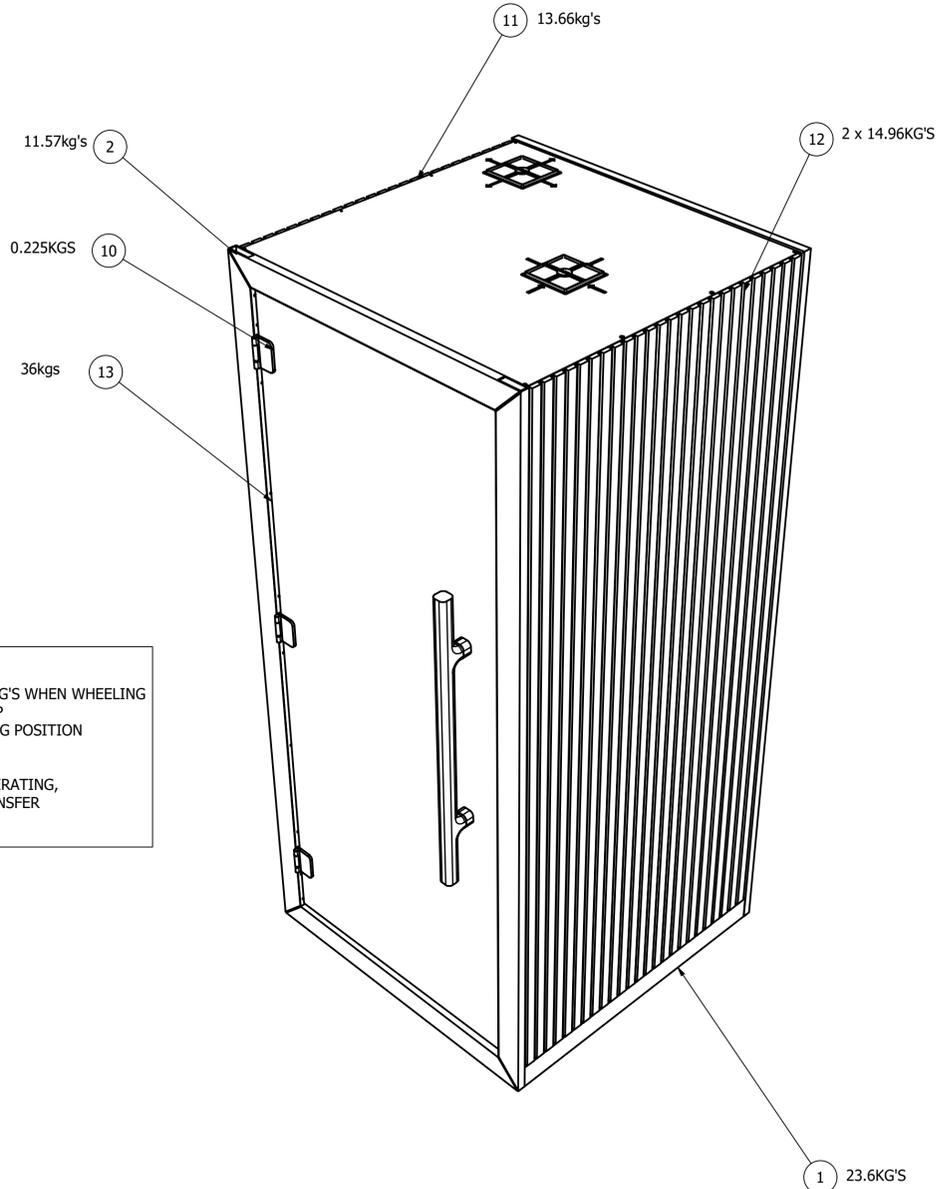

TOTAL WEIGHT 221.4KGS
 DISTRIBUTION PER FOOT
 44.28KG
 Seismic anchors available



DRAWN	TOM DUNFORD	04/07/2025	THE MEETING POD COMPANY	
CHECKED			TITLE	
QA			PHONE BOOTH TECHNICAL SPECIFICATION	
MFG			SIZE	DWG NO
APPROVED			D	PB TS 04-07
			SCALE	1 / 10
				SHEET 5 OF 6

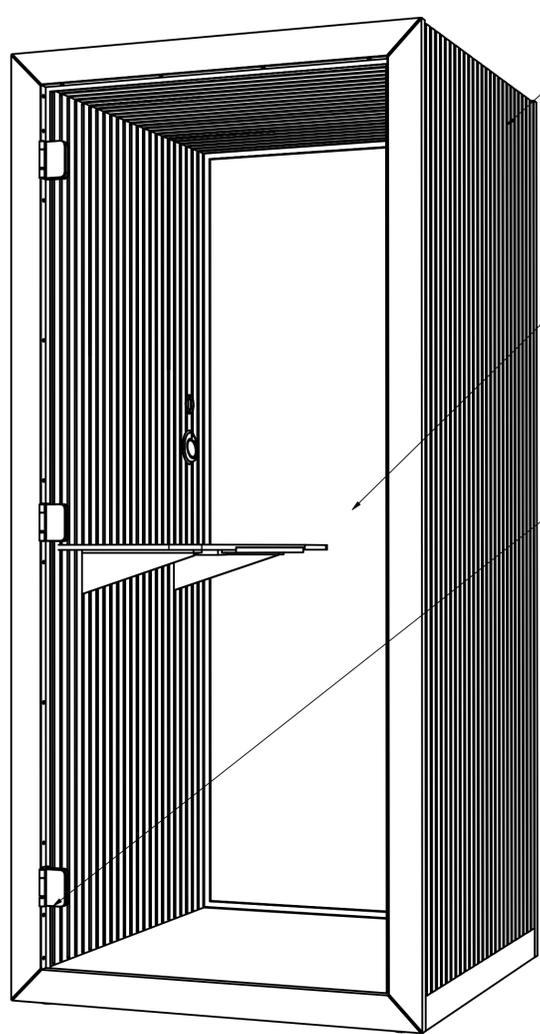


EXTERIOR OPTION

- OAK SLAT PANELLING
- FABRIC PANEL
- FABRIC OPTION GABRIEL
- ISLAND STORM 60999
- MOTTISTON LONGSTONE 61259
- SEAVIEW SAND 61233

REAR PANEL OPTION

- TEMPERED GLASS
- FABRIC ACOUSTIC PANEL
- FABRIC OPTION GABRIEL
- ISLAND STORM 60999
- MOTTISTON LONGSTONE 61259
- SEAVIEW SAND 61233

R/H HINGE PLACEMENT

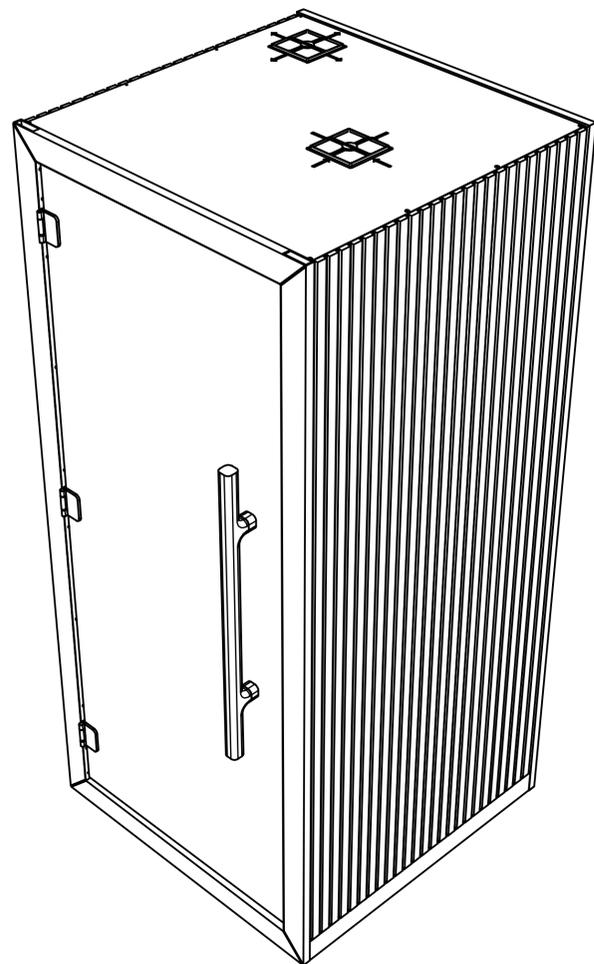

CLEANING GUIDE

GLASS (FRONT AND REAR PANES)

MATERIALS: 6MM TOUGHENED GLASS

CLEANER: STANDARD GLASS CLEANER (NON-ABRASIVE)

CLOTH: LINT-FREE MICROFIBRE CLOTH

TIP: SPRAY CLEANER ONTO CLOTH, NOT DIRECTLY ONTO GLASS TO PREVENT DRIPS BEHIND SEALS. ALUMINIUM ENCLOSURES (FRONT & REAR)

FINISH: POWDER-COATED OR ANODISED ALUMINIUM

CLEANER: GLASS CLEANER/ DAMP

CLOTH: SOFT MICROFIBRE OR NON-SCRATCH SPONGE

AVOID: ABRASIVE PADS, BLEACH OR AMMONIA-BASED PRODUCTS

OAK-FACED MDF PANELS (GROOVED WALLS & CEILING)

CLEANER: HOOVER ONLY, WIPE STAINS

DIRECTION: WIPE ALONG THE GRAIN AND GROOVES

DRYING: ALWAYS FOLLOW WITH A DRY CLOTH TO PREVENT MOISTURE ABSORPTION

AVOID: OVER-WETTING, AS MOISTURE CAN AFFECT MDF CORES

HIGH PRESSURE LAMINATE (HPL) TABLE

CLEANER: MULTI-SURFACE CLEANER OR DILUTED VINEGAR SOLUTION


CLOTH: MICROFIBRE CLOTH

EXTRA: FOR STICKY MARKS, USE A MELAMINE SPONGE LIGHTLY (E.G. MAGIC ERASER)


NOTES BOARD

- INSTALLATION TIME 2-3 HOURS, 2 PEOPLE
- KEEP 150MM GAP FROM CEILING TO PREVENT TURBULENCE WITH FANS
- PLACE POD WITHIN 1 METRE REACH OF SOCKET
- UK TMPC INSTALLATION TEAM

Manufactured vs Purchased Components

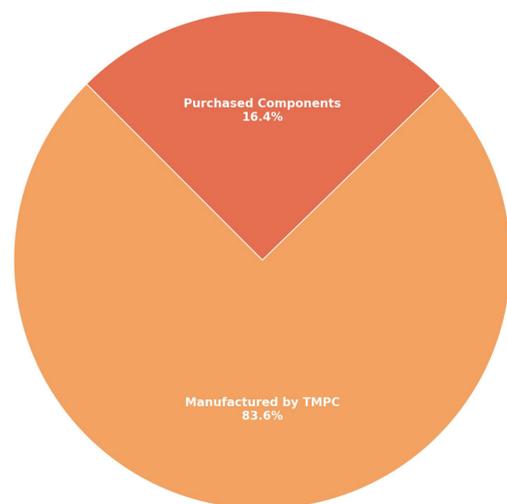

Material Composition by Weight

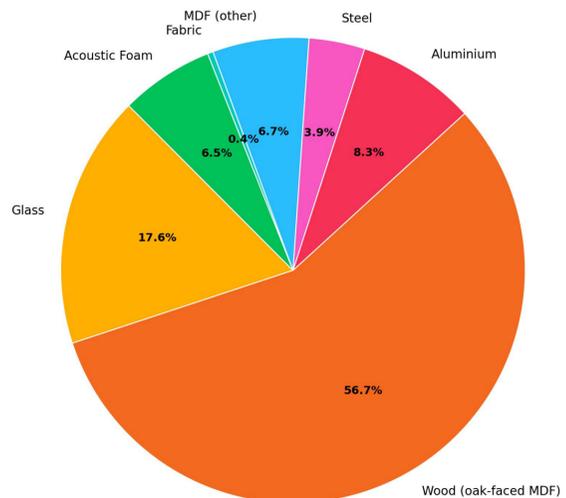

DRAWN TOM DUNFORD	04/07/2025	THE MEETING POD COMPANY	
CHECKED		TITLE	
QA		PHONE BOOTH TECHNICAL SPECIFICATION	
MFG		SIZE D	DWG NO PB TS 04-07
APPROVED		SCALE 1 / 10	REV
		SHEET 6 OF 6	