



SECTION A-A
SCALE 1 / 10

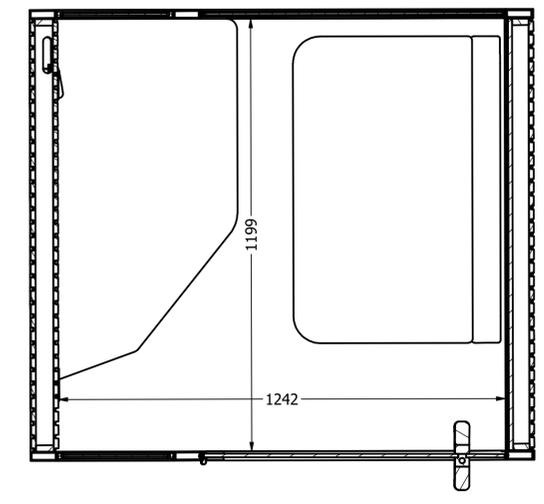





SECTION B-B
SCALE 1 / 10

DRAWN Tom Dunford	29/07/2025		
CHECKED		TITLE	
QA			
MFG			
APPROVED			
		SIZE D	DWG NO WB TS 29-07
		SCALE 1 / 10	REV
		SHEET 1 OF 6	

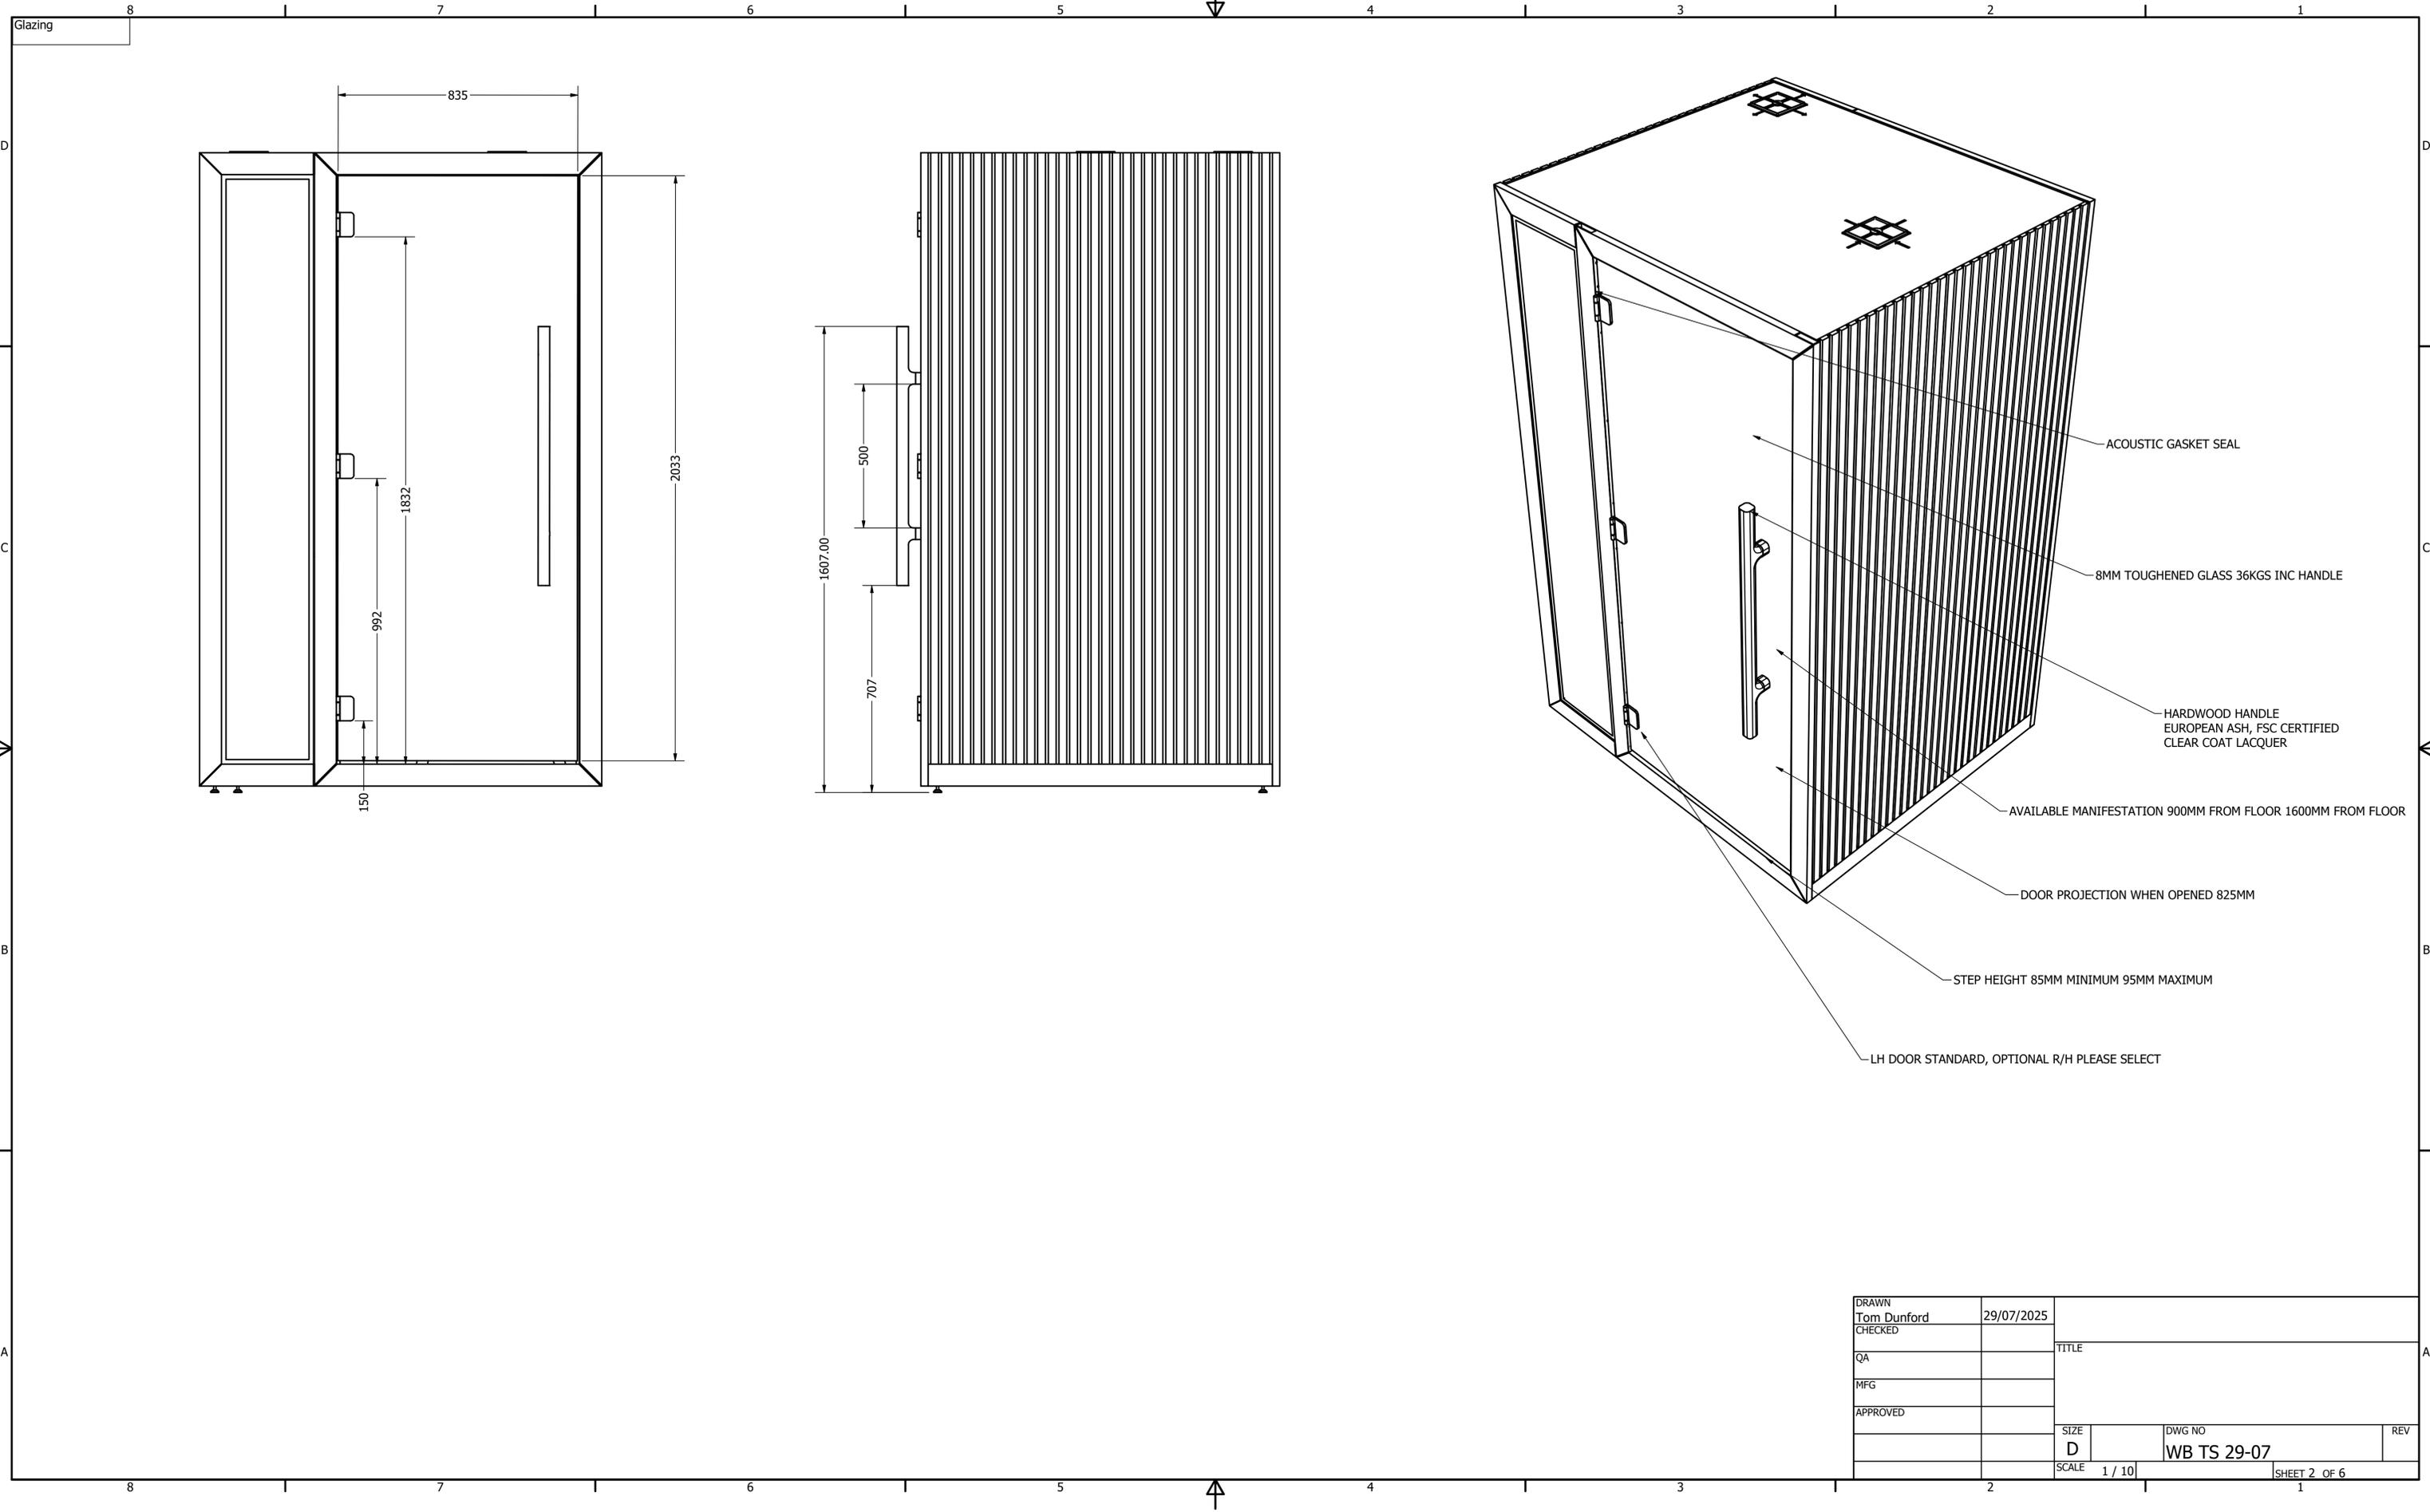


DRAWN	Tom Dunford	29/07/2025		
CHECKED			TITLE	
QA				
MFG				
APPROVED				
			SIZE	DWG NO
			D	WB TS 29-07
			SCALE	1 / 10
				SHEET 2 OF 6



SECTION C-C
SCALE 1 / 10

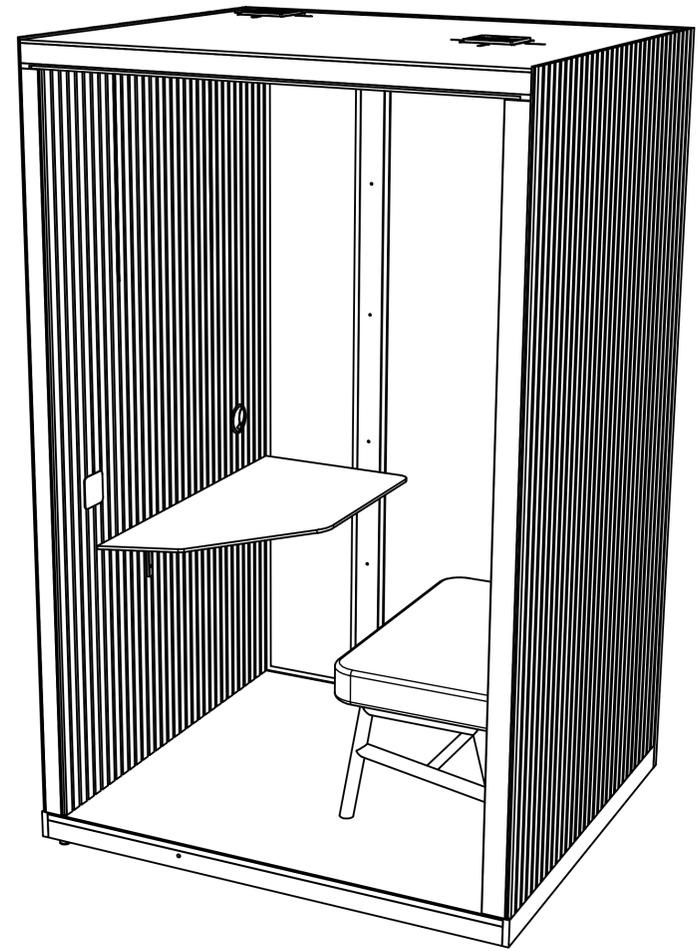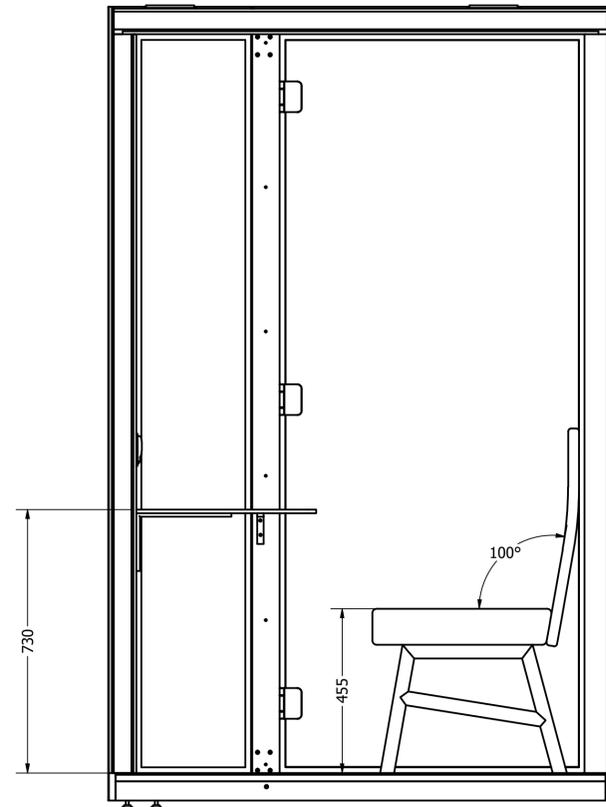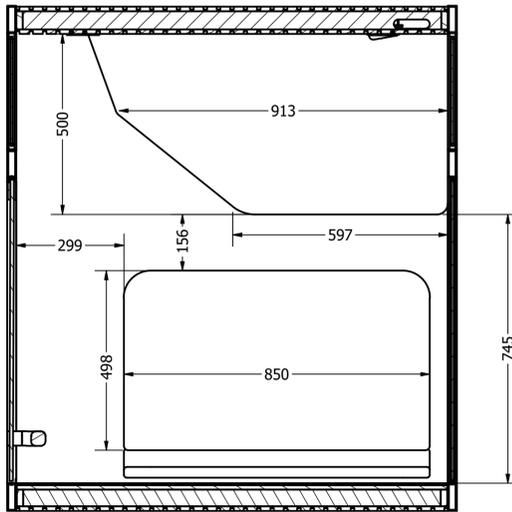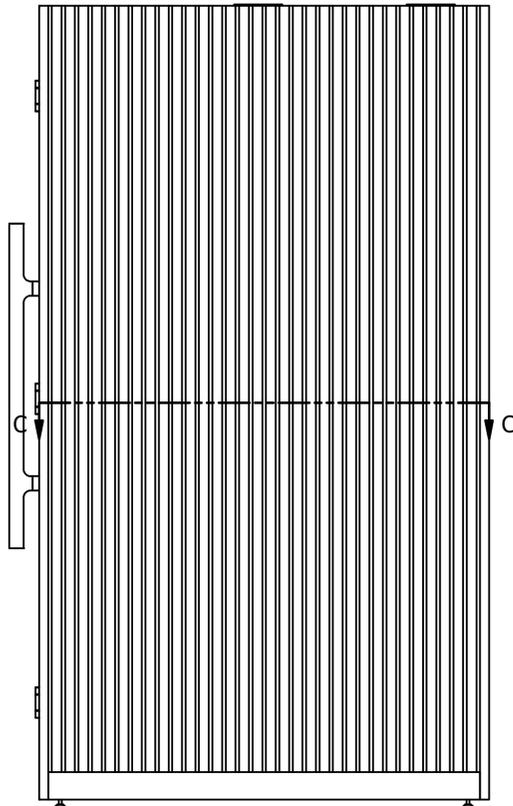

DRAWN	Tom Dunford	29/07/2025		
CHECKED			TITLE	
QA				
MFG				
APPROVED				
			SIZE	DWG NO
			D	WB TS 29-07
			SCALE	1 / 10
				SHEET 3 OF 6




- 24V LED LIGHTING
- CEILING TRACK LENGTH 300MM
- WALL TRACK LENGTH 600MM
- TRACK WIDTH 11MM
- DIFFUSER OPAL
- DIMMABLE ON LANTÉ TOUCHSCREEN
- COLOUR TEMPERATURE 6500K
- 5W PER METRE

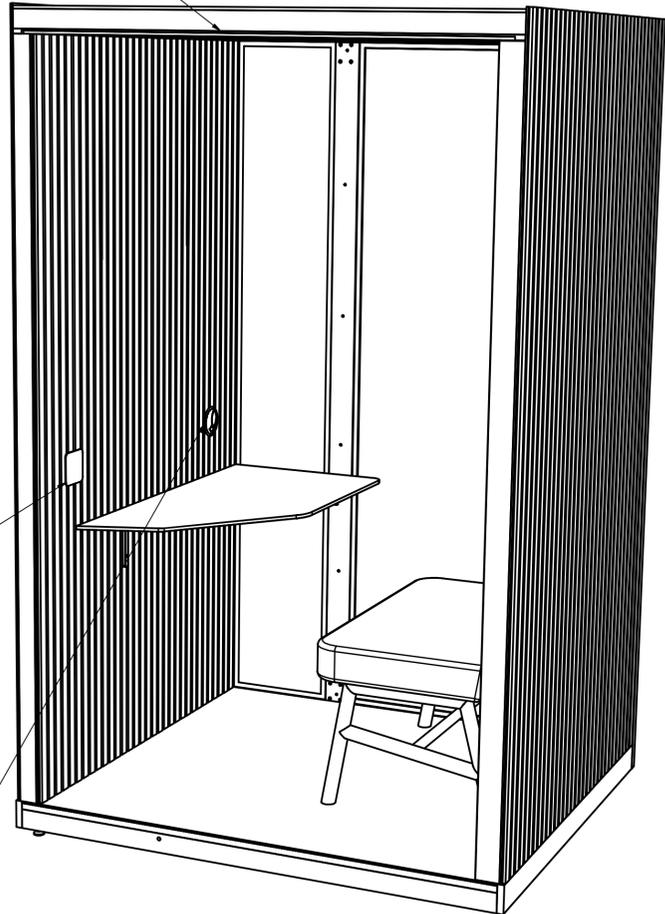

12V TOUCH DIMMER SWITCH


- LIGHTING ADJUSTMENT
- FAN SPEED ADJUSTMENT




PIXEL SOCKET BLACK FACE, SILVER BEZEL
3.15A/5A
USB A/ USB C TYPE
DATA/HDMI OPTIONS AVAILABLE

CONSUMPTION
IDLE 0.5WATT
PIR OCCUPATION 50.5 WATT
MAXIMUM USAGE 1,234 WATT


EXHAUST

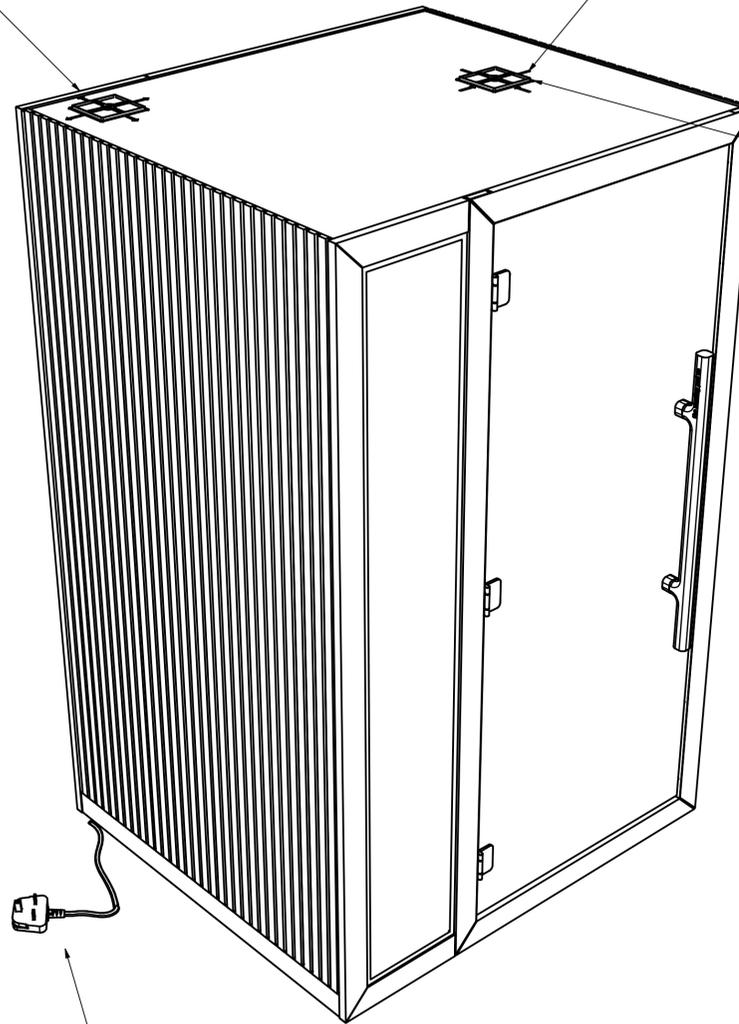

INTAKE



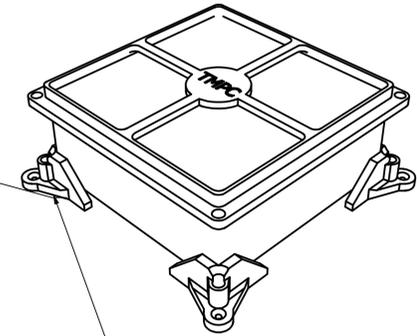


- 12V DC FAN
- 120MM DIAMETER DUAL BEARING
- 26 DB
- 200 CFM
- 184 CHANGES PER HOUR
- HEPA FILTER
- INTAKE POSITION TO TAKE COOL AIR OVER THE WORKING POSITION




- CONNECTION, UK PLUG SOCKET TYPE
- FUSED 13AMP
- POWER EXIT BACK LEFT
- POWER REACH 1.5METRES FROM CORNER

DRAWN Tom Dunford	29/07/2025	TITLE	
CHECKED			
QA			
MFG			
APPROVED			
		SIZE D	DWG NO WB TS 29-07
		SCALE 1 / 10	REV
		SHEET 4 OF 6	

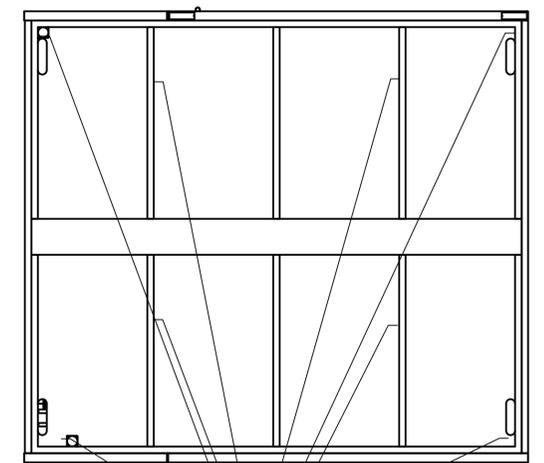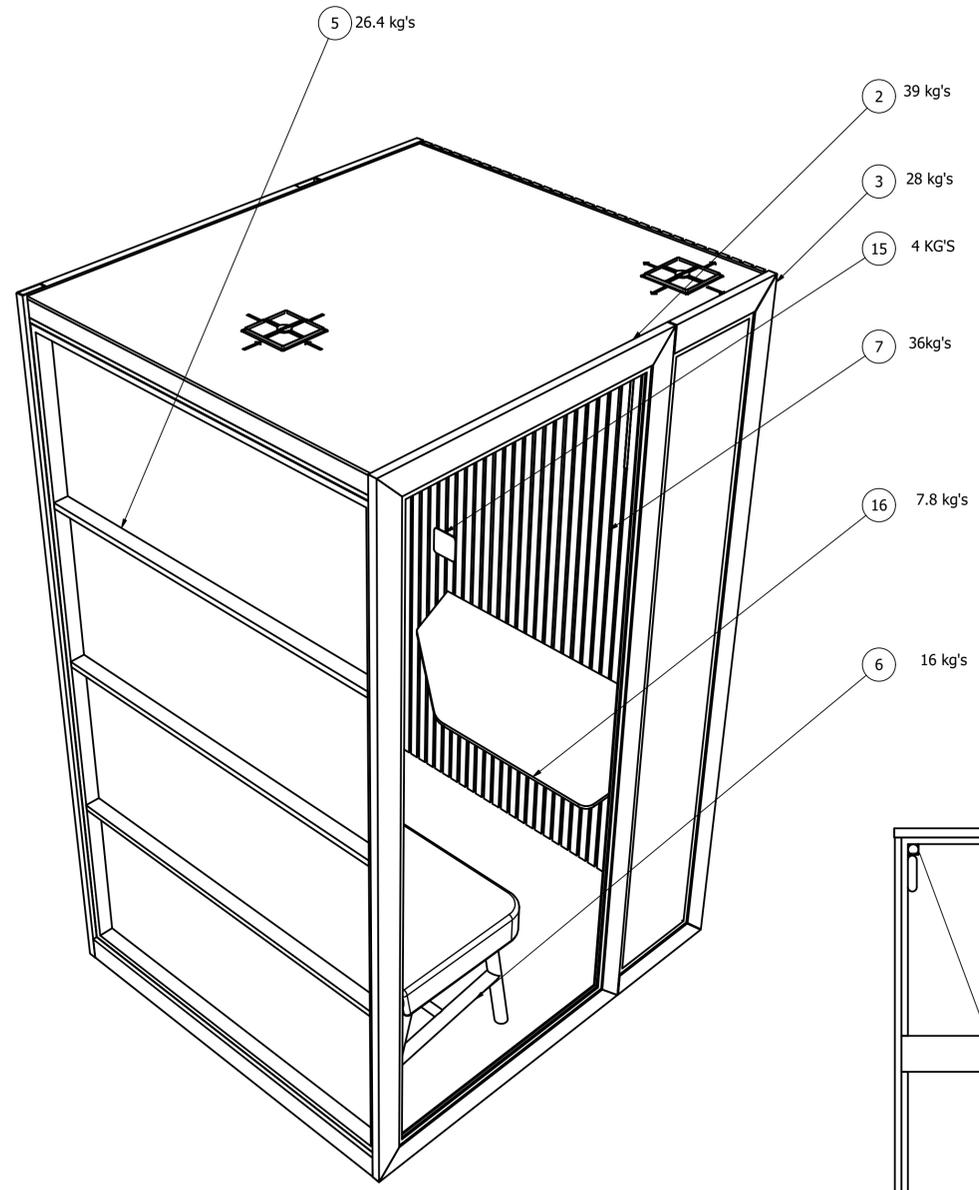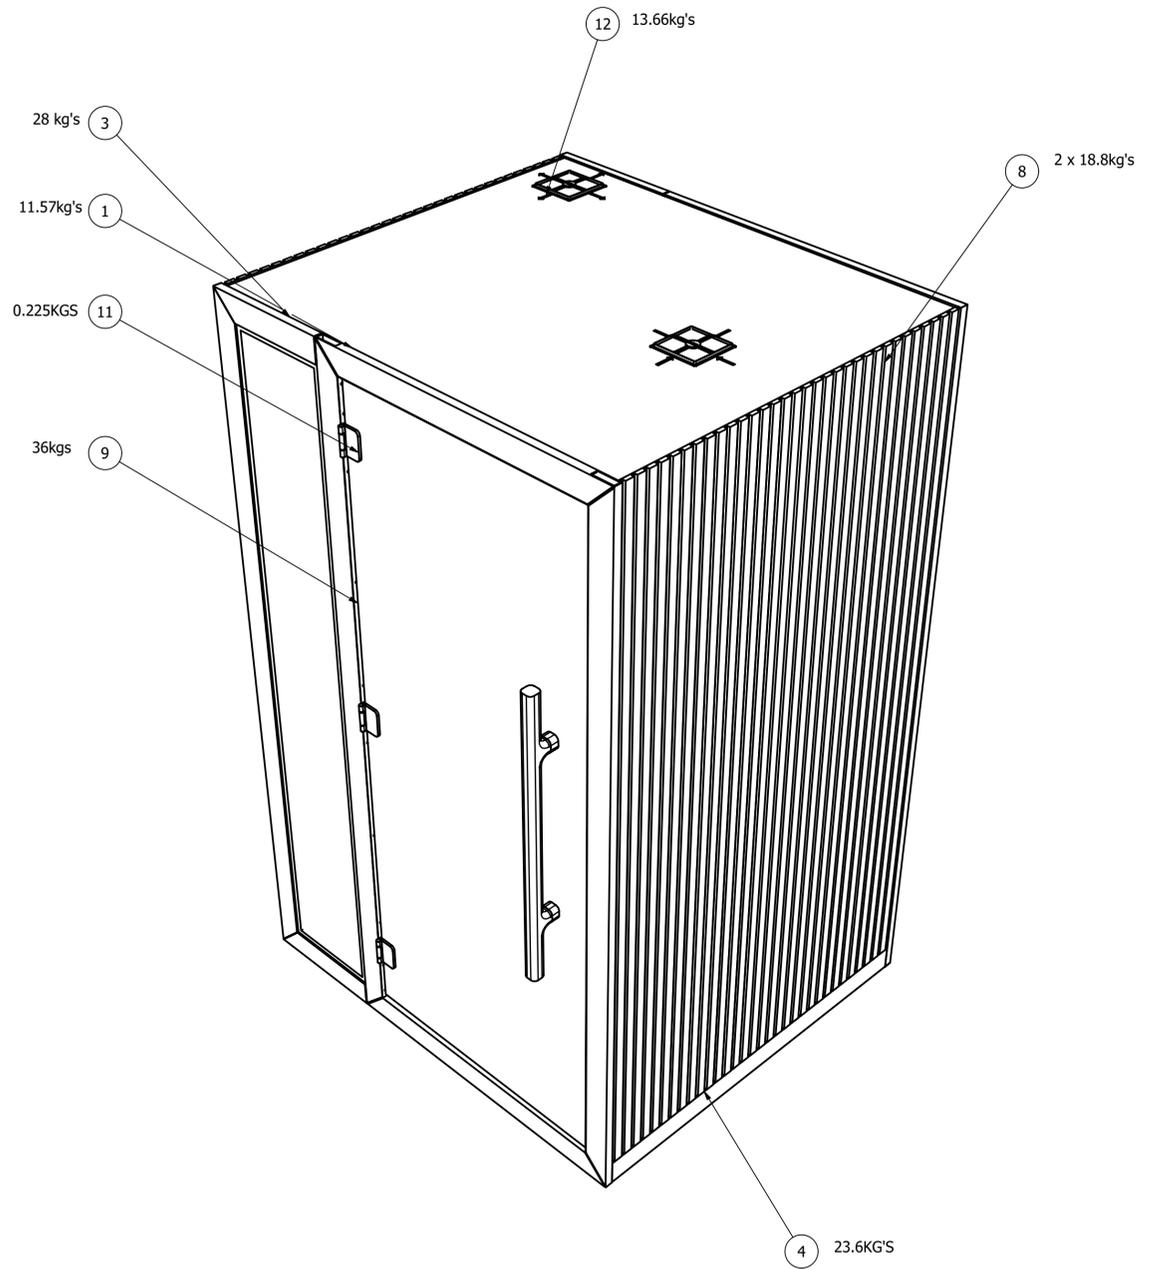

TOTAL WEIGHT 307.855KGS
 DISTRIBUTION PER FOOT
 38.48KG
 Seismic anchors available


DRAWN	Tom Dunford	29/07/2025	TITLE	
CHECKED				
QA				
MFG				
APPROVED				
			SIZE	DWG NO
			D	WB TS 29-07
			SCALE	1 / 10
			SHEET 5 OF 6	

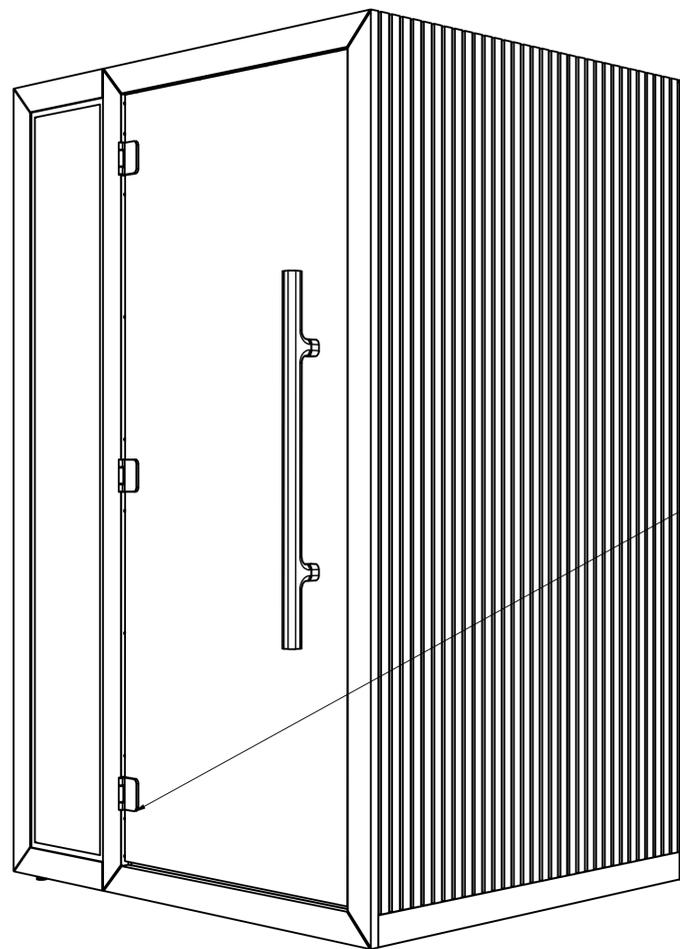


- EXTERIOR OPTION**
- OAK SLAT PANELLING
 - FABRIC PANEL
 - FABRIC OPTION GABRIEL
 - ISLAND STORM 60999
 - MOTTISTON LONGSTONE 61259
 - SEAVIEW SAND 61233

- REAR PANEL OPTION**
- TEMPERED GLASS
 - FABRIC ACOUSTIC PANEL
 - FABRIC OPTION GABRIEL
 - ISLAND STORM 60999
 - MOTTISTON LONGSTONE 61259
 - SEAVIEW SAND 61233


R/H HINGE PLACEMENT

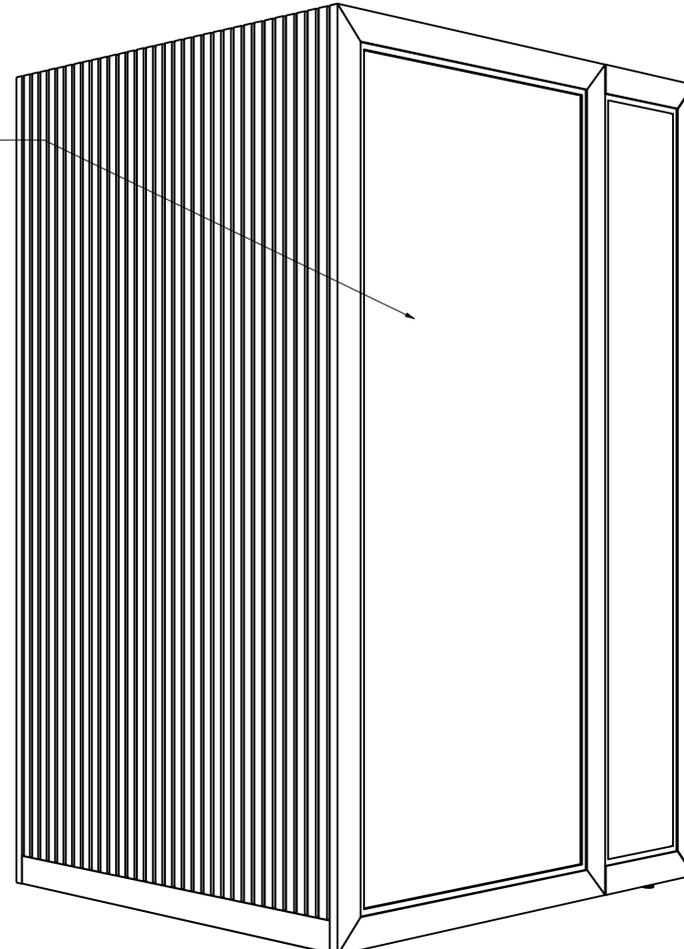

Breakdown of Purchased vs Manufactured Components

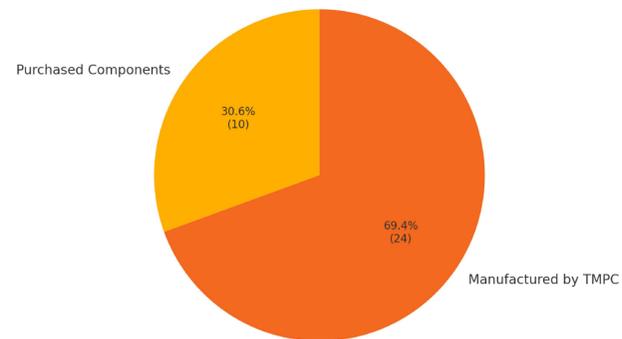

Material Composition by Weight

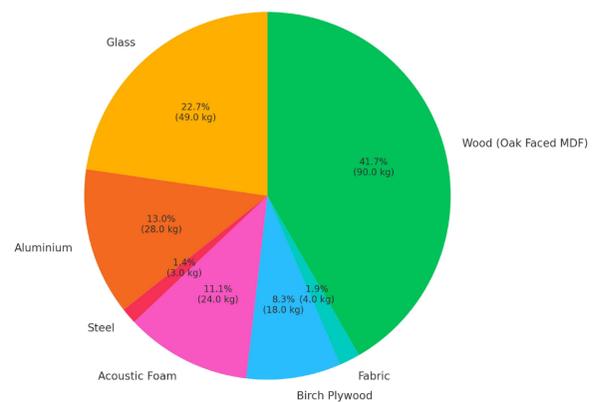

CLEANING GUIDE

GLASS (FRONT AND REAR PANES)
MATERIALS: 6MM TOUGHENED GLASS

CLEANER: STANDARD GLASS CLEANER (NON-ABRASIVE)
CLOTH: LINT-FREE MICROFIBRE CLOTH

TIP: SPRAY CLEANER ONTO CLOTH, NOT DIRECTLY ONTO GLASS TO PREVENT DRIPS BEHIND SEALS.
ALUMINIUM ENCLOSURES (FRONT & REAR)

FINISH: POWDER-COATED OR ANODISED ALUMINIUM
CLEANER: GLASS CLEANER/ DAMP

CLOTH: SOFT MICROFIBRE OR NON-SCRATCH SPONGE
AVOID: ABRASIVE PADS, BLEACH OR AMMONIA-BASED PRODUCTS

OAK-FACED MDF PANELS (GROOVED WALLS & CEILING)
CLEANER: HOOVER ONLY, WIPE STAINS

DIRECTION: WIPE ALONG THE GRAIN AND GROOVES
DRYING: ALWAYS FOLLOW WITH A DRY CLOTH TO PREVENT MOISTURE ABSORPTION
AVOID: OVER-WETTING, AS MOISTURE CAN AFFECT MDF CORES

HIGH PRESSURE LAMINATE (HPL) TABLE
CLEANER: MULTI-SURFACE CLEANER OR DILUTED VINEGAR SOLUTION
CLOTH: MICROFIBRE CLOTH
EXTRA: FOR STICKY MARKS, USE A MELAMINE SPONGE LIGHTLY (E.G. MAGIC ERASER)

NOTES BOARD

- INSTALLATION TIME 2-3 HOURS, 2 PEOPLE
- KEEP 150MM GAP FROM CEILING TO PREVENT TURBULENCE WITH FANS
- PLACE POD WITHIN 1 METRE REACH OF SOCKET
- UK TMPC INSTALLATION TEAM

DRAWN	Tom Dunford	29/07/2025		
CHECKED			TITLE	
QA				
MFG				
APPROVED				
			SIZE	DWG NO
			D	WB TS 29-07
			SCALE	1 / 10
				SHEET 6 OF 6